

※ Ratings: 20KW~750KW, Voltages: 120V~6600V, Frequency: 60/50Hz, Revolution: 1800/1500 Rpm, Power Factor: 0.8

GENERATOR SET					DOOSAN ENGINE								GEN SET PHYSICAL DATA		
MODEL	STANDBY		PRIME		MODEL	STANDBY		PRIME		FUEL CON-	BORE &	NO.OF	DIMENSION L×W×H(mm)	WEIGHT (KG)	PAD SIZE L×W(mm)
	(KW)		(KW)			(PS)		(PS)		SUMPTION	STROKE	CYLINDER			
	50Hz	60Hz	50Hz	60Hz		50Hz	60Hz	50Hz	60Hz	(L/H)(PRIME)	(mm)				
DJG-26D	24	26	21	24	DB33	39	47	35	43	9.2	102×100	I-4	1890×750×1460	850	2300×1100
DJG-50D	41	50	36	45	P034TI	65	82	57	75	15.6	102×100	I-4	2035×750×1460	1070	2400×1100
DJG-60D	50	60	46	55	DB58	80	96	73	87	18.1	102×118	I-6	2290×850×1460	1300	2700×1300
DJG-90D	75	90	68	82	D1146	116	143	105	130	26.6	111×139	I-6	2500×850×1460	1800	2900×1300
DJG-130D	104	130	94	118	D1146T	160	202	145	170	35.9	111×139	I-6	2600×900×1460	1900	2900×1300
DJG-200D	178	200	158	182	P086TI	270	303	240	279	56.8	111×139	I-6	2728×850×1650	2250	3200×1400
DJG-250D	227	250	201	227	P126TI-III	343	375	304	343	68.2	123×155	I-6	2994×920×1600	2400	3500×1400
DJG-275D	249	275	221	250	P126TI	370	405	328	378	76.5	123×155	I-6	2994×920×1600	2500	3500×1400
DJG-300D	266	300	241	273	P126TI- II	395	465	358	418	89.5	123×155	I-6	2994×920×1600	2600	3500×1400
DJG-320D	292	320	291	291	P158LE- II	437	491	399	447	93.5	128×142	V-8	2990×1150×1900	3200	3500×1800
DJG-360D	329	360	297	327	P158LE- I	492	546	444	498	104	128×142	V-8	2990×1150×1900	3300	3500×1800
DJG-400D	378	400	332	364	P158LE	563	602	494	547	115.7	128×142	V-8	2990×1150×1900	3400	3500×1800
DJG-450D	-	450	-	409	P158LE-III	-	625	-	690	129.6	128×142	V-8	3170×1150×1900	3500	3700×1800
DJG-500D	455	500	406	445	P180LE	674	734	602	676	144.6	128×142	V-10	3170×1150×1900	3600	3700×1800
DJG-520D	455	520	415	473	P180LE-S	674	771	615	705	138.1	128×142	V-10	3170×1150×1900	3600	3700×1800
DJG-550D	-	550	-	500	P180LE- II	-	850	-	765	155.6	128×142	V-12	3600×1400×1900	3900	4000×1800
DJG-610D	527	610	651	555	P222LE	781	898	723	803	173.5	128×142	V-12	3390×1150×1900	4100	4000×1800
DJG-630D	554	630	506	573	P222LE-S	820	927	750	850	166.1	128×142	V-12	3390×1150×1900	4200	4100×1800
DJG-660D	598	660	-	600	P222LE- II	886	1000	-	906	192.1	128×142	V-12	3390×1150×1900	4200	4100×1800
DJG-750D	-	750	-	682	P222FE- II	-	1115	-	998	201.6	128×142	V-12	3390×1150×1900	4200	4100×1800

• Variety of selectable engines

According to the preference of customers, we provide various products manufactured by the world's most famous brands.

DOOSAN / Mitsubishi / CUMMINS / HYUNDAI etc

•Heavy-duty Battery Recharger

When recharging batteries, the voltage of the battery can be seen, and by making the recharge capacity larger, the time was shortened.


20~600kW : 5A , 600kW~ : 10A

•Convenient Service Fuel Tank

To prevent rusting in the tank, anticorrosive paint was painted to protect the engine, and the amount of fuel can be easily check by the fuel level.

•Large Capacity Embarked Fuel Tank

The embark capacity was maximized, so that it could be used for more than 4 hours.

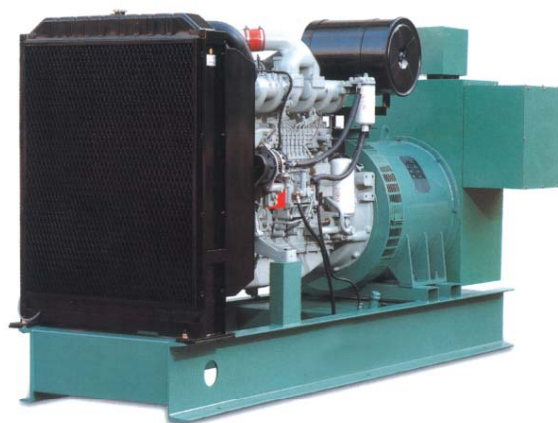

•All information is intended for general purpose only. The data given in this table are subject to change without notice.

•Producing with ISO 9001 and ISO 14001 standards