

※ Ratings: 40KW~320KW, Voltages: 120V~6600V, Frequency: 60/50Hz,  
Revolution: 1800/1500 Rpm, Power Factor: 0.8

GENERATOR SET					HYUNDAI ENGINE								GEN SET PHYSICAL DATA		
MODEL	STANDBY (KW)		PRIME (KW)		MODEL	STANDBY (PS)		PRIME (PS)		FUEL CON-SUMPTION (L/H)(PRIME)	BORE & STROKE (mm)	NO.OF CYLINDER	DIMEMSION L×W×H(mm)	WEIGHT	PAD SIZE W×L(mm)
	50Hz	60Hz	50Hz	60Hz		50Hz	60Hz	50Hz	60Hz						
DJG-40H	34	40	30	37	D4AF-G	50	60	45	54	12	104×105	I-4	1800×800×1200	900	2100×1100
DJG-55H	42	55	38	50	D4AK-G	60	82	54	74	15.6	100×105	I-4	1800×800×1200	1000	2100×1100
DJG-80H	63	80	57	73	D6BR-G1	110	130	99	117	27.4	118×115	I-6	2300×910×1400	1400	2600×1300
DJG-115H	97	115	89	105	D6BT-G1	155	180	140	162	43.5	118×115	I-6	2500×910×1400	1800	2900×1300
DJG-150H	138	150	124	135	D6AZ-G2	230	250	207	225	46	130×140	I-6	2700×910×1500	2100	3000×1400
DJG-185H	162	185	146	167	D6AZ-G1	270	309	243	278	58.7	130×140	I-6	2700×910×1500	2200	3000×1400
DJG-230H	195	230	177	210	D6AC-G1	320	350	288	315	64.3	130×140	I-6	2700×910×1500	2400	3000×1400
DJG-275H	230	275	210	250	D6CA-G3	334	410	327	400	73	104×105	I-6	2900×1100×1600	2900	3200×1500
DJG-300H	245	300	220	272	D6CA-G2	400	450	352	430	81	104×105	I-6	2900×1100×1600	2900	3200×1500
DJG-320H	260	320	236	288	D6CA-G1	400	490	360	440	89	104×105	I-6	2900×1100×1600	2900	3200×1500

### • Variety of selectable engines

According to the preference of customers, we provide various products manufactured by the world's most famous brands.

**DOOSAN / Mitsubishi / CUMMINS / HYUNDAI etc**

### • Heavy-duty Battery Recharger

When recharging batteries, the voltage of the battery can be seen, and by making the recharge capacity larger, the time was shortened.


**20~600kW : 5A , 600kW~ : 10A**

### • Convenient Service Fuel Tank

To prevent rusting in the tank, anticorrosive paint was painted to protect the engine, and the amount of fuel can be easily check by the fuel level.

### • Large Capacity Embarked Fuel Tank

The embark capacity was maximized, so that it could be used for more than 4 hours.

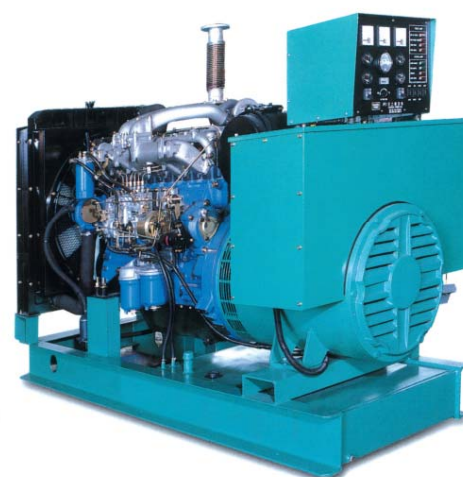

•All information is intended for general purpose only. The data given in this table are subject to change without notice.

•Producing with ISO 9001 and ISO 14001 standards